


POLYMAR BUILT UP ROOFING

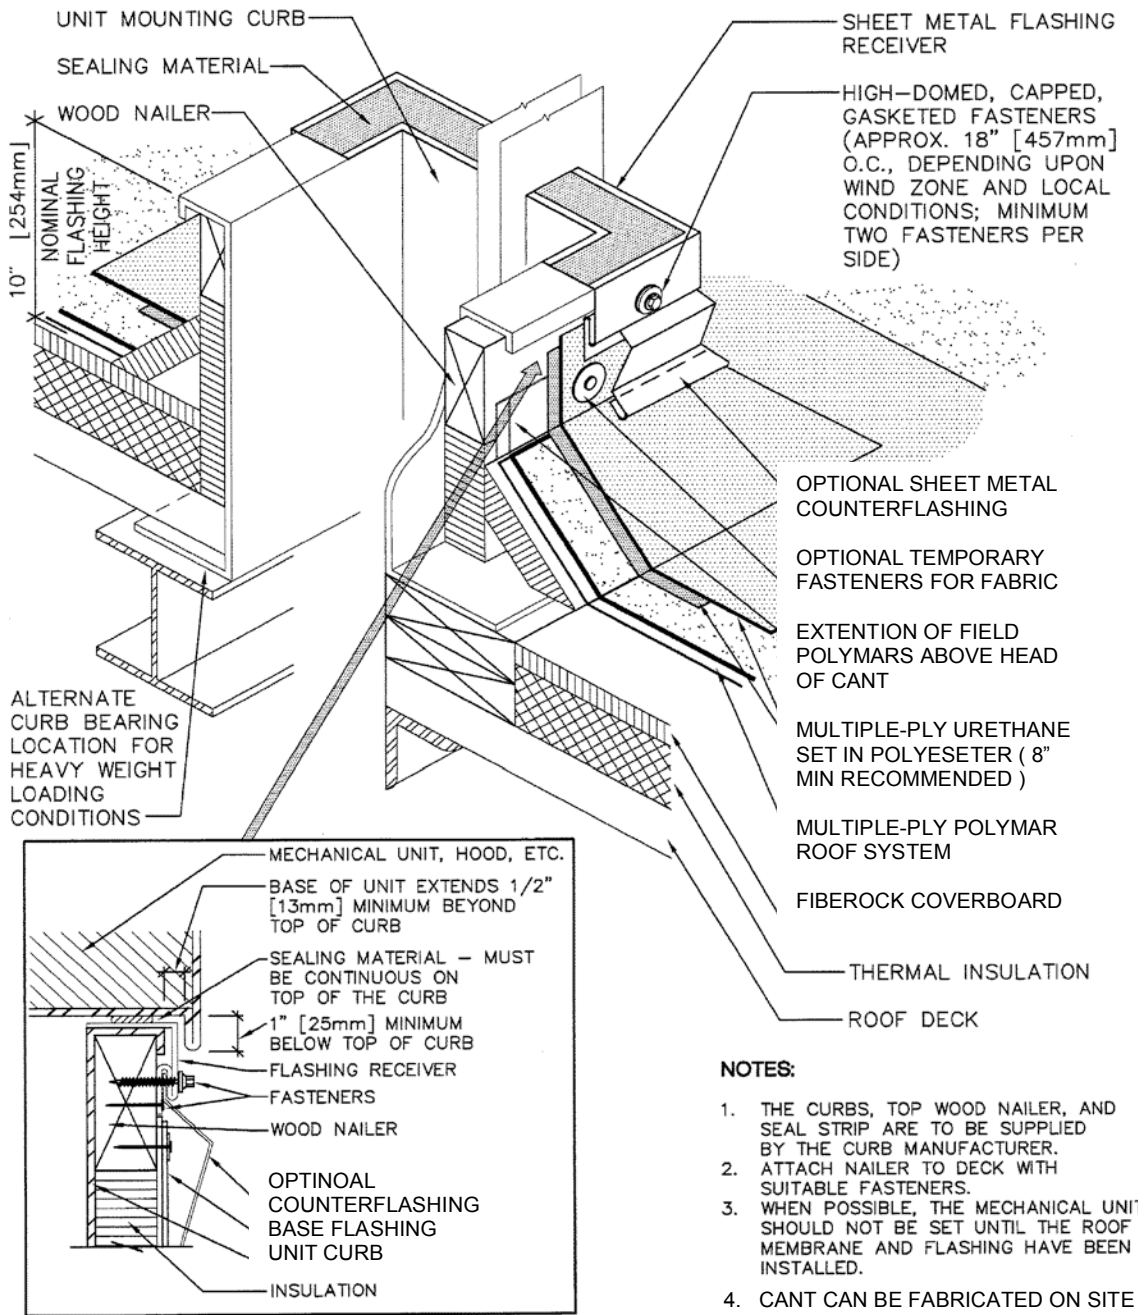

NOTES:

1. THE CURBS, TOP WOOD NAILER, AND SEAL STRIP ARE TO BE SUPPLIED BY THE CURB MANUFACTURER.
2. ATTACH NAILER TO DECK WITH SUITABLE FASTENERS.
3. WHEN POSSIBLE, THE MECHANICAL UNIT SHOULD NOT BE SET UNTIL THE ROOF MEMBRANE AND FLASHING HAVE BEEN INSTALLED.
4. CANT CAN BE FABRICATED ON SITE WITH URETHANE MASTIC. MIN 3" GIRTH TAPERING 1/2" FROM CENTER

**ADUREL
POLYMAR
ROOFING SYSTEMS**

CURB DETAIL

ACD-1