

POLYMAR BUILT UP ROOFING

MULTI-PLY POLYMAR ROOF SYSTEM

MULTIPLE- PLY URETHANE WITH FABRIC

FASTENERS AT APPROX. 3' O.C. STAGGERED

GUTTER SPACER ALTERNATELY SPACED FROM BRACKETS


URETHANE TRANSITION WITH FABRIC INTO GUTTER

OPTIONAL CONTINUOUS CLEAT

GUTTER BRACKET SUPPORT AT 12" TO 36" DEPENDING ON CONDITIONS

SHEET METAL GUTTER

OPTIONAL: TURN DOWN

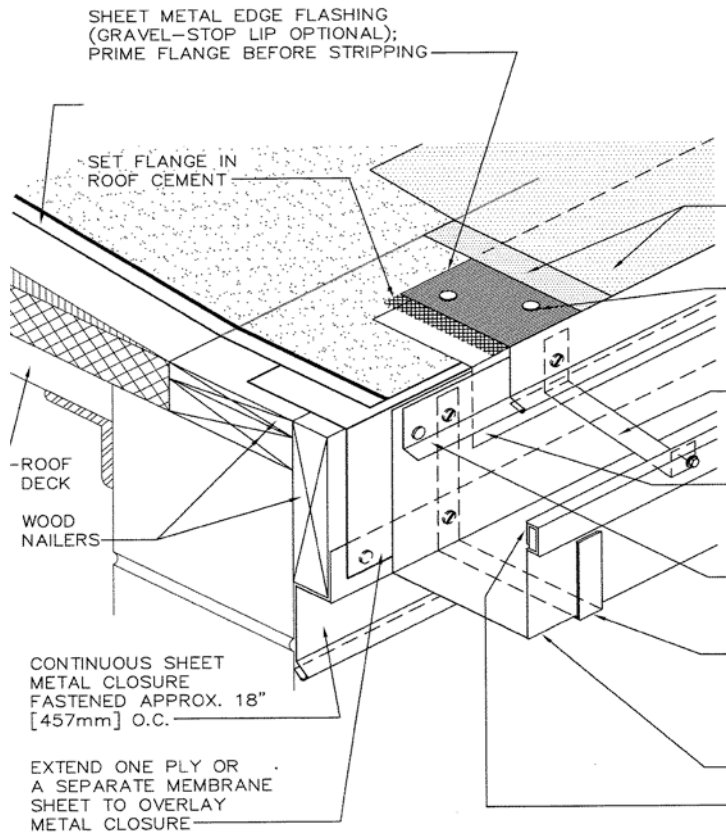

NOTES:

1. IN CLIMATES WHERE THE WINTER TEMPERATURE REMAINS BELOW FREEZING FOR EXTENDED PERIODS OF TIME, EXTEND SYSTEM DIRECTLY INTO GUTTER WITH 3 COURSE URETHANE AND REINFORCEMENT FABRIC.
2. GUTTER BRACKETS ARE TO BE 1 GUAGE HEAVIER THAN GUTTER STOCK..
3. ATTACH WOOD NAILERS TO WALL/DECK WITH SUITABLE FASTENERS.
4. DESIGN GUTTER EXPANTION JOINTS PLACED AT APPROPRIATE INTERVALS COMMENSURATE THE TYPE OF METAL.

**ADUREL
POLYMAR
ROOFING SYSTEMS**

GUTTER

AGD-1