


**POLYMAR BUILT UP ROOFING**

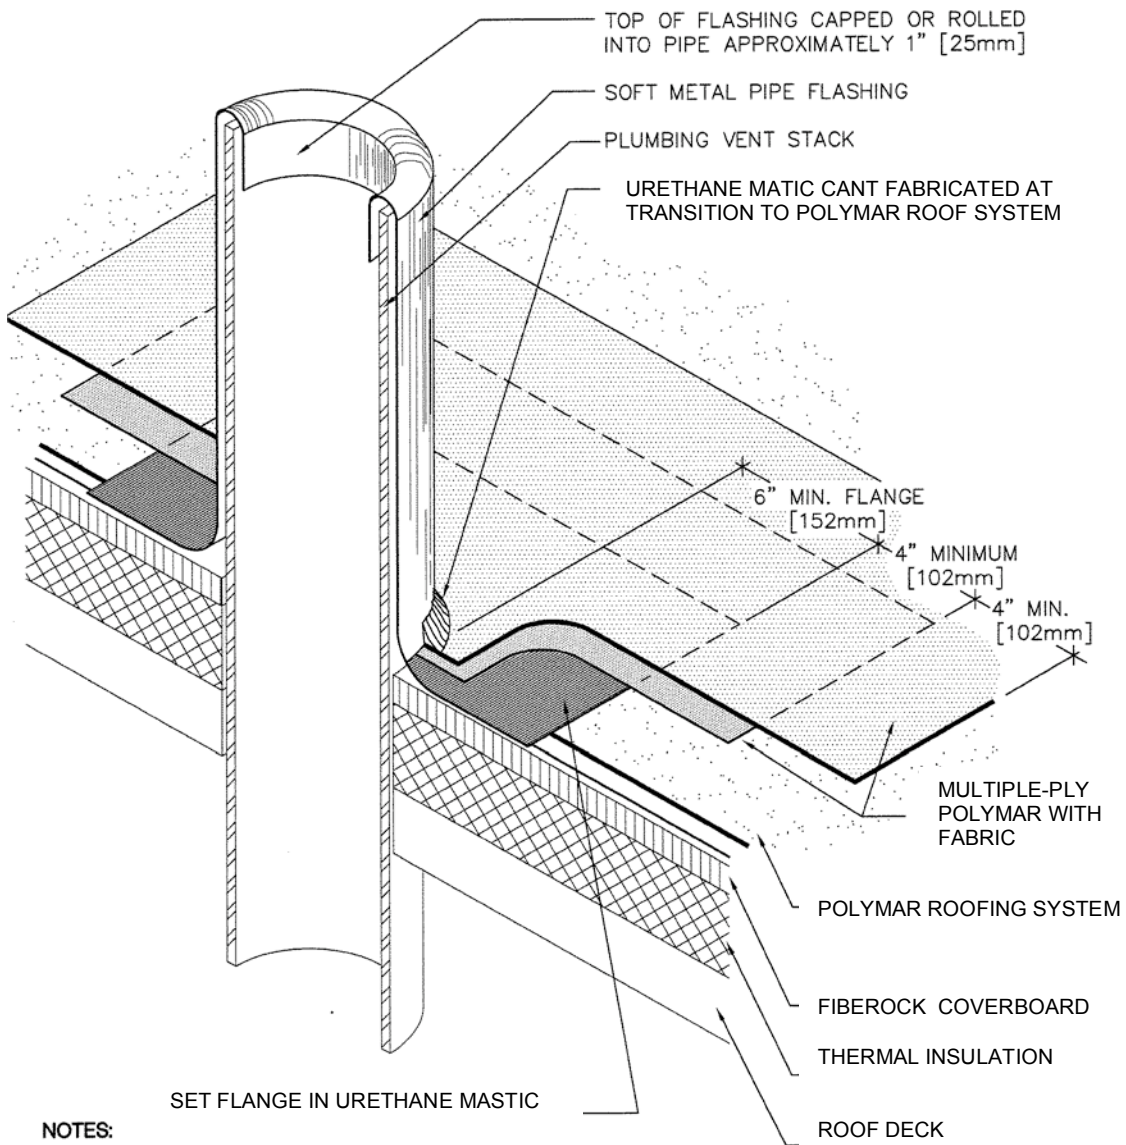

**NOTES:**

1. SOFT METAL PIPE FLASHING:
  - SHEET LEAD: MINIMUM OF 2 1/2 LB. PER SQUARE FOOT [12 kg/m<sup>2</sup>] OR
  - SHEET COPPER: MINIMUM 16 OZ. [5 kg/m<sup>2</sup>].
2. IF USING COPPER FLASHING OVER AN IRON OR STEEL PIPE, INSERT A SEPARATOR SHEET (E.G., ASPHALT-SATURATED ROOFING FELT), WRAPPED AROUND PIPE, TO SEPARATE THE COPPER FLASHING FROM DIRECT CONTACT WITH PIPE, TO REDUCE GALVANIC ACTION.
3. VENT STACKS AND OTHER PIPES SHOULD HAVE A MINIMUM OF 12 INCHES [305mm] OF CLEARANCE ON ALL SIDES FROM WALLS, CURBS, AND OTHER PROJECTIONS TO FACILITATE PROPER FLASHING. (SEE TABLE 4.)

**ADUREL  
POLYMAR  
ROOFING SYSTEMS**

**PLUMBING STACK**

**APS-1**